



## ■ AERODYNAMICS

Aero parts have been provided to the various areas to improve the vehicle's aerodynamic characteristics.

- A rear spoiler has been provided to smooth the airflow above the body.
- Spats have been provided forward of the front and rear wheels to smooth the airflow around the wheels.

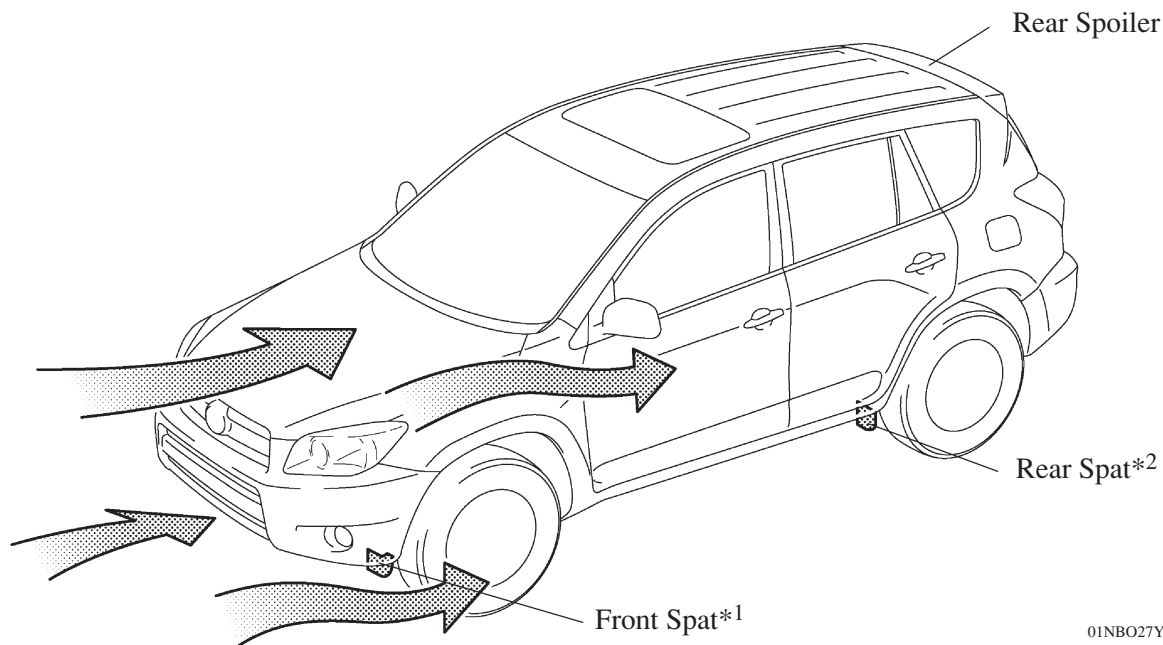

**Long Body Model**

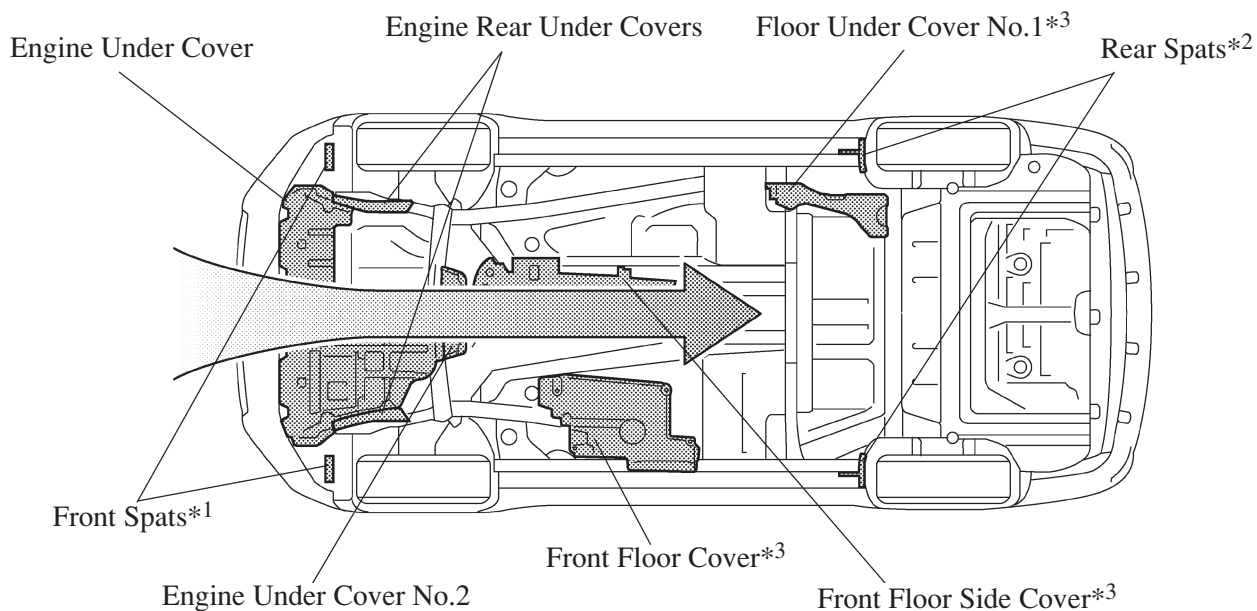

**View from Lower**

01NBO28Y

\*1: Standard Equipment on G Grade for Europe Models

\*2: Standard Equipment on G Grade for Europe, Australia, and G.C.C. Countries Models

\*3: Standard Equipment on Europe Models