

Last Modified: 03-12-2013	6.4 A	Doc ID: RM1000000005EVT
Model Year: 2013	Model: RAV4	Prod Date Range: [12/2012 -]
Title: AUDIO / VIDEO: RADIO RECEIVER: REMOVAL; 2013 MY RAV4 [12/2012 -]		

REMOVAL

PROCEDURE

1. PRECAUTION

NOTICE:

After turning the ignition switch off, waiting time may be required before disconnecting the cable from the battery terminal. Therefore, make sure to read the disconnecting the cable from the battery terminal notice before proceeding with work.

Click here



2. DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL

NOTICE:

When disconnecting the cable, some systems need to be initialized after the cable is reconnected.

Click here



3. REMOVE CENTER NO. 1 INSTRUMENT CLUSTER FINISH PANEL

Click here



4. REMOVE NO. 3 INSTRUMENT PANEL REGISTER ASSEMBLY

Click here



5. REMOVE NO. 4 INSTRUMENT PANEL REGISTER ASSEMBLY

Click here




6. REMOVE TELLTALE LIGHT ASSEMBLY

Click here



7. REMOVE RADIO RECEIVER ASSEMBLY

- (a) Remove the 4 bolts.

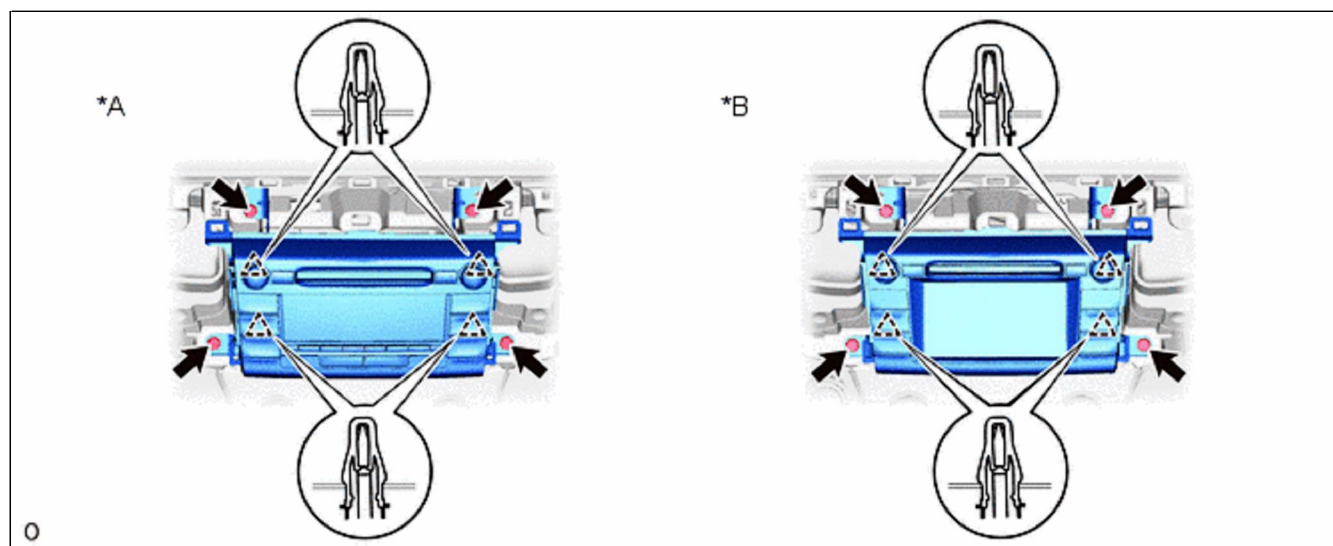


*A	for Radio Receiver Type	*B	for Radio and Display Type
----	-------------------------	----	----------------------------

- (b) Detach the 4 clips and remove the radio receiver assembly with bracket.
- (c) Disconnect each connector.

8. REMOVE NO. 1 RADIO BRACKET


- (a) Remove the 3 screws and No. 1 radio bracket.

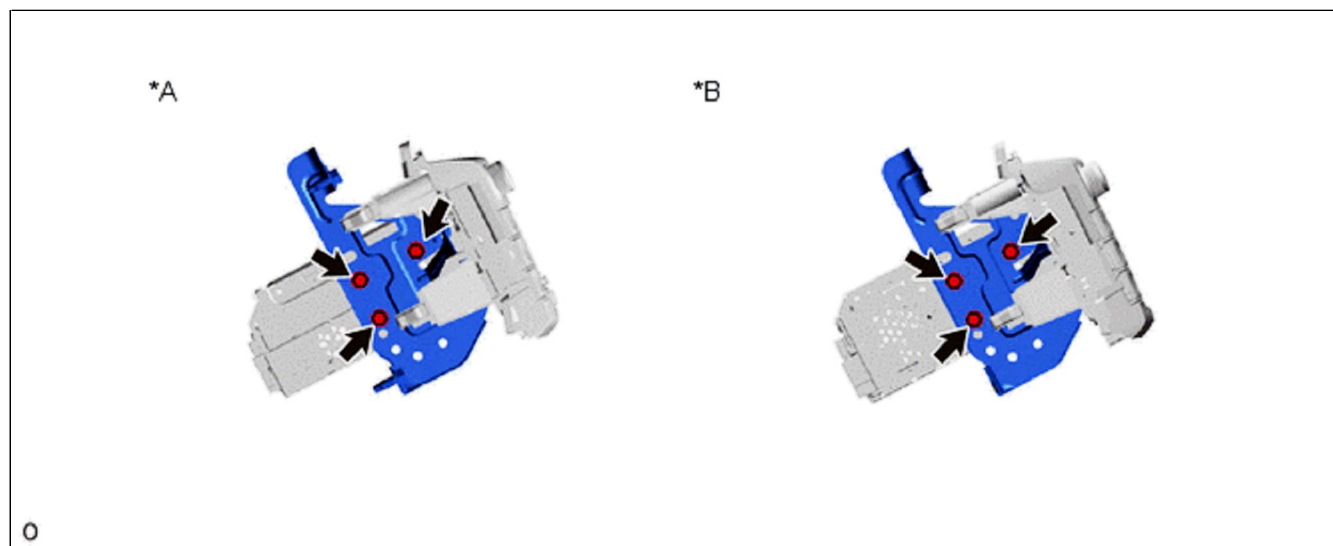

*A	for Radio Receiver Type	*B	for Radio and Display Type
----	-------------------------	----	----------------------------

9. REMOVE NO. 2 RADIO BRACKET

- (a) Remove the 3 screws and No. 2 radio bracket.

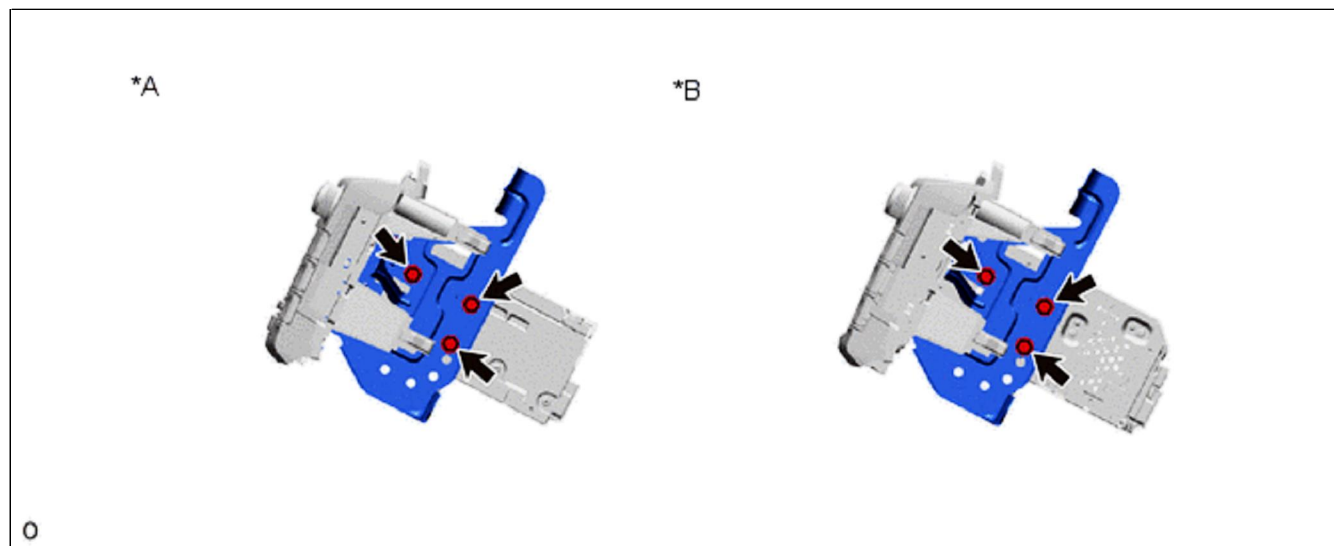

*A	for Radio Receiver Type	*B	for Radio and Display Type
----	-------------------------	----	----------------------------

